
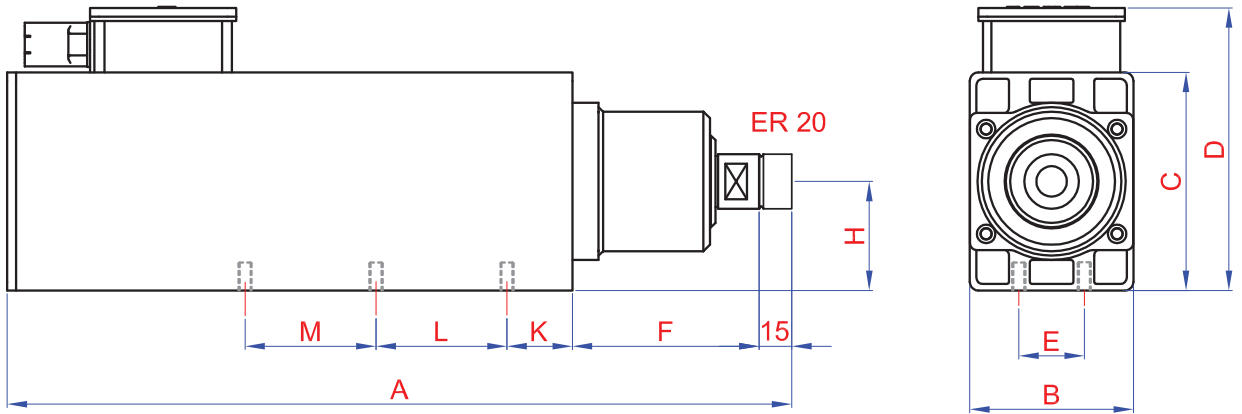
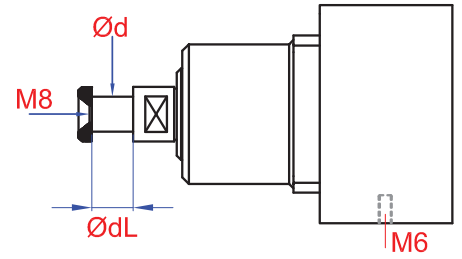


▶ ARFM.2K MOTORLAR / SPINDLES

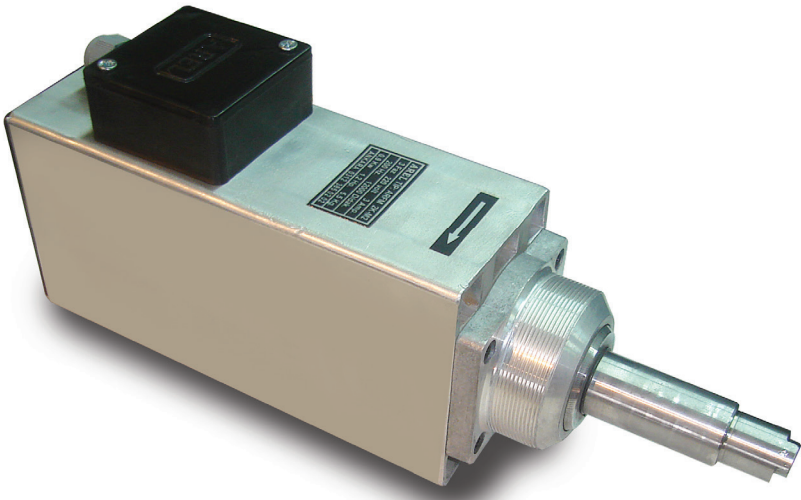

TİP / TYPE	A mm	B mm	C mm	D mm	E mm	F mm	H mm	K mm	L mm	M mm	Ø d mm	Ø dL mm
ARFM.2K-S	259,5	75	100	130	30	85,5	50	30	60	-	20	25
ARFM.2K-M	309,5	75	100	130	30	85,5	50	30	60	-	20	25
ARFM.2K-L	359,5	75	100	130	30	85,5	50	30	60	60	20	25

TİP / TYPE	KW / HP	Rpm	Hz.	Volt	Amper	Kg.	PENS / COLLETS
ARFM.2K-S2	0,5 / 0,68	12.000	200	220V - 3~	1,8	3,80	ER 16 1 - 10 mm
ARFM.2K-S3	0,75 / 1	18.000	300	220V - 3~	2,6	3,80	
ARFM.2K-M2	0,9 / 1,2	12.000	200	220V - 3~	1,6	5,50	
ARFM.2K-M3	1,4 / 1,9	18.000	300	220V - 3~	4,6	5,50	
ARFM.2K-M4	0,18 / 0,25	3.000	50	380V - 3~	0,35	5,50	ER 20 1 - 13 mm
ARFM.2K-L2	1,3 / 1,75	12.000	200	220V - 3~	4,25	7,20	
ARFM.2K-L3	2 / 2,65	18.000	300	220V - 3~	6,7	7,20	
ARFM.2K-L4	0,37 / 0,5	3.000	50	380V - 3~	0,8	7,20	